



SPECIFICATIONS

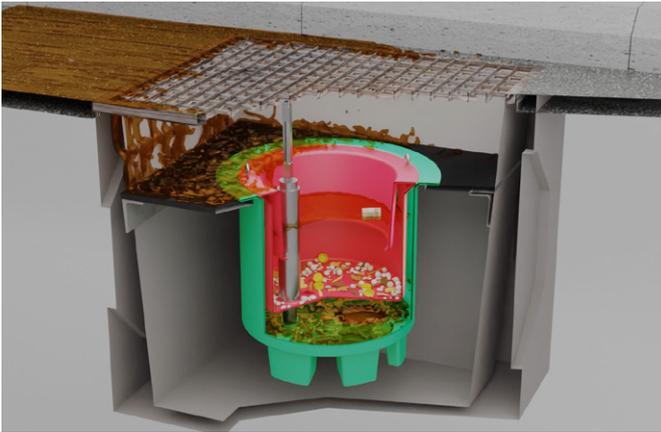

Liquids are retained when the isolation valve is in the closed position.

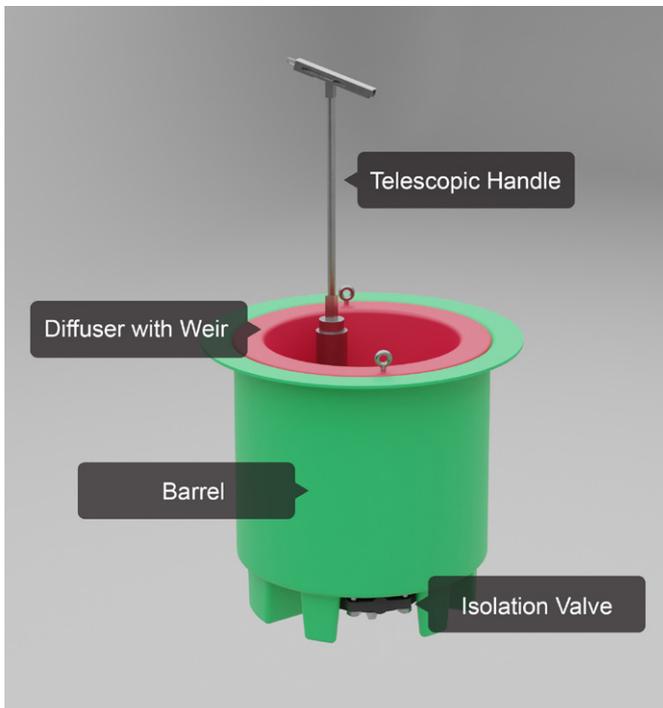

The DrainSAFE™ is a serviceable unit that retrofits inside a drain pit. Once installed it sits entirely beneath the drain grate. It does not impede wheel or foot traffic over the grate.

The isolation valve that closes the unit and stops flow into the stormwater system is engaged manually by extending and turning the telescopic handle within the unit.

The stainless steel handle stows in a protective shaft within the diffuser body and beneath the grate. Once engaged, the telescopic handle will extend up to 500mm above ground level out of the grate.

Debris is captured in the diffuser body. Hydrocarbons are trapped by an absorbent boom secured within the diffuser.

SPECIFICATIONS:

- Flow rate 33L/s
- 4mm thick polyethylene
- 560mmH barrel
- 620mm Dia including the top lip
- Manufactured tolerance +/- 2mm

INSTALL COMPONENTS

- HDPE pit skirt 1.2m x 1.2m x 15mm thick
- Mounting blocks
- Sealant
- Concrete fasteners

WEIGHT	DIMENSIONS	CAPACITY
19 kg	0.62mDia x 0.56mH	80L

DS210318

